



1) SJ-XG690G

□ CONNECTOR

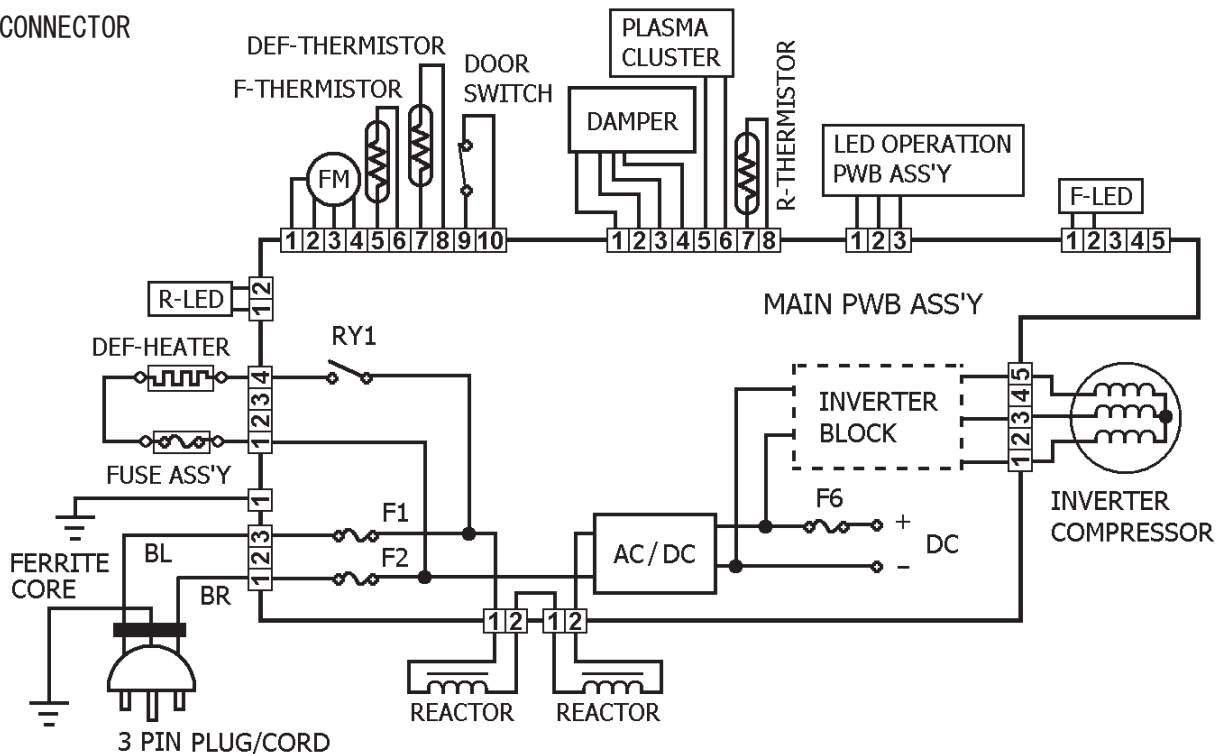


3) SJ-XG690M

□ CONNECTOR

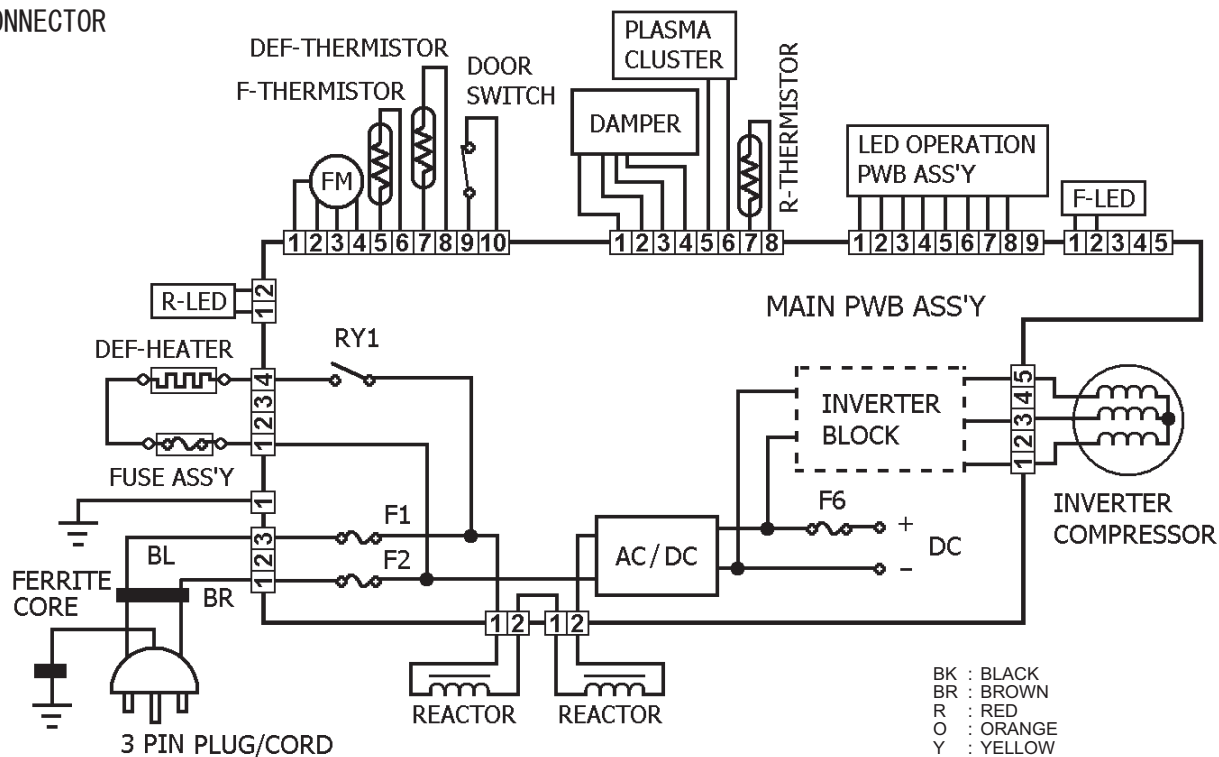

BK : BLACK
 BR : BROWN
 R : RED
 O : ORANGE
 Y : YELLOW
 GR : GREEN
 BL : BLUE
 V : VIOLET
 GY : GRAY
 W : WHITE
 P : PINK
 SB : SKY-BLUE
 G/Y : GREEN/YELLOW STRIPE


1) SJ-XG690G

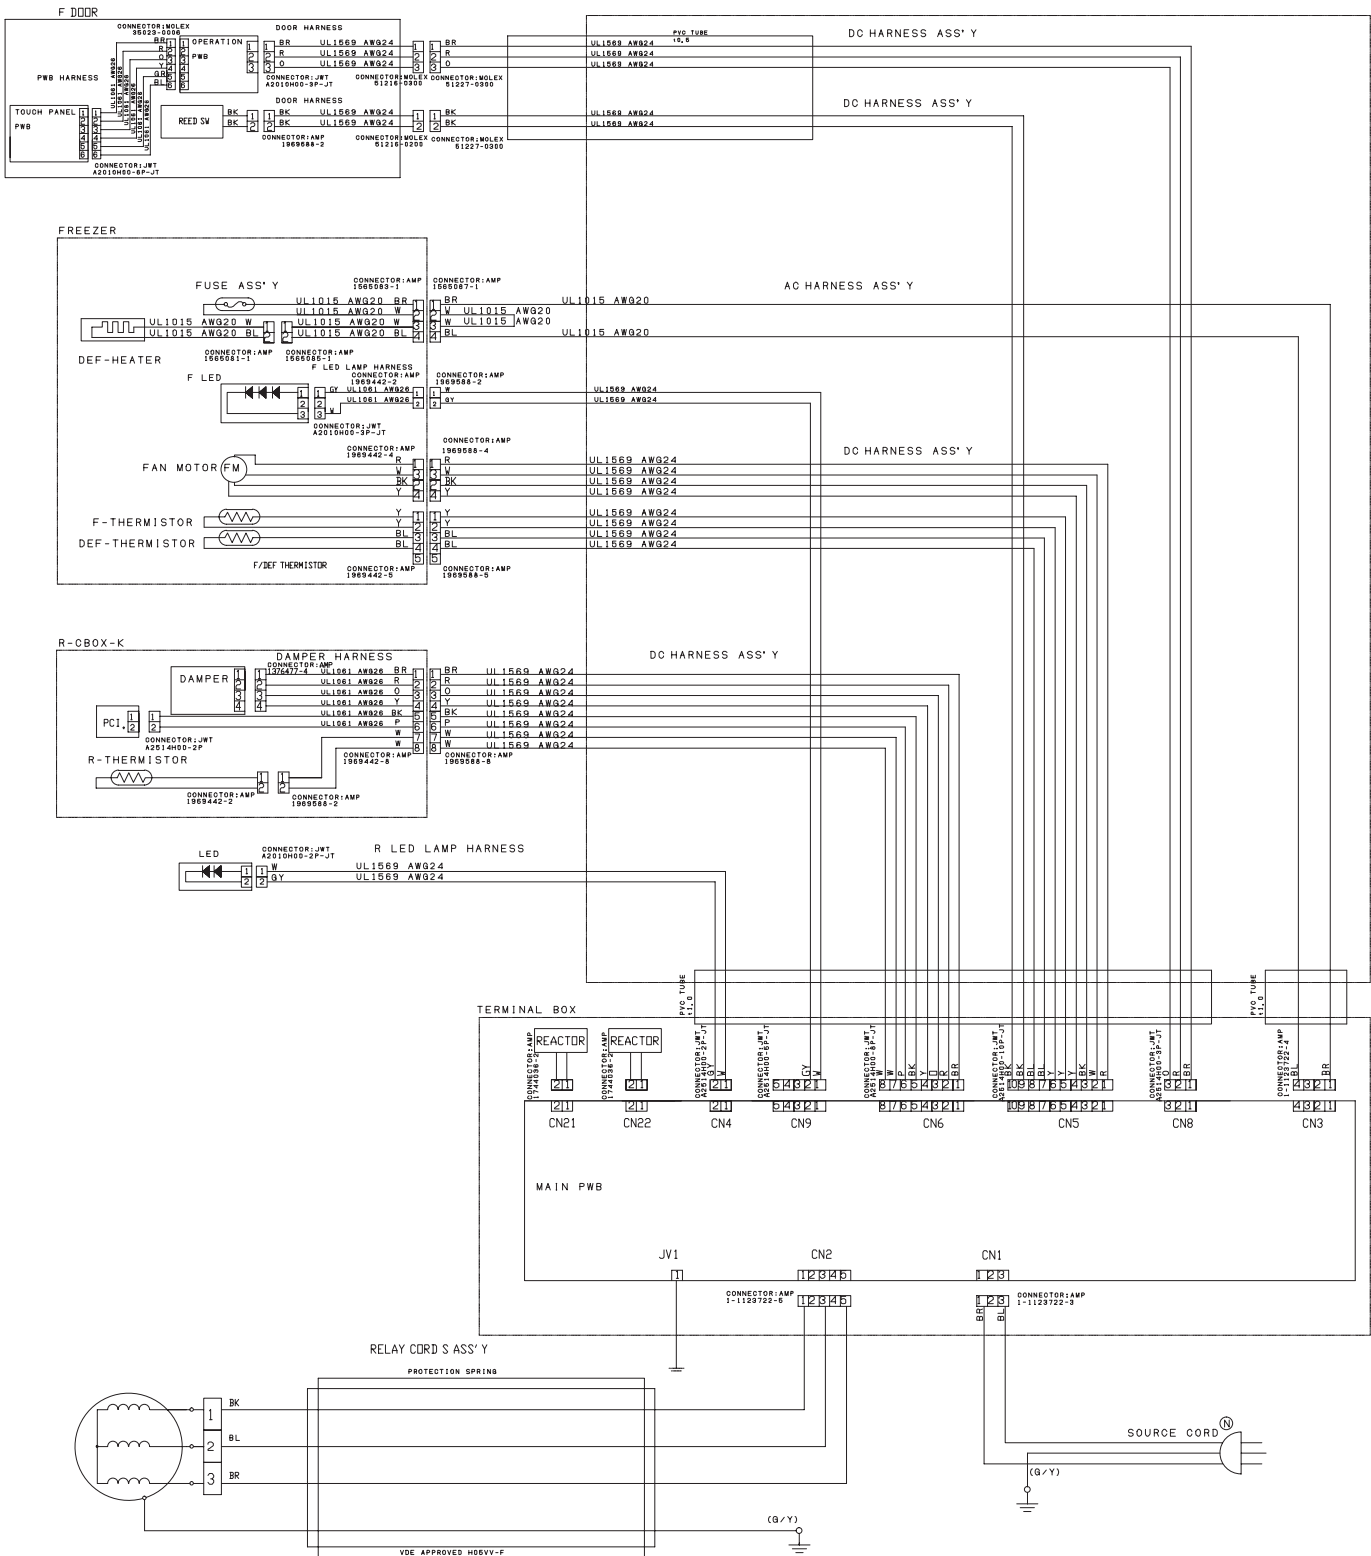


BK : BLACK
BR : BROWN
R : RED
O : ORANGE
Y : YELLOW
GR : GREEN
BL : BLUE
V : VIOLET
GY : GRAY
W : WHITE
P : PINK
SB : SKY-BLUE
G/Y : GREEN/YELLOW STRIPE



3) SJ-XG690M

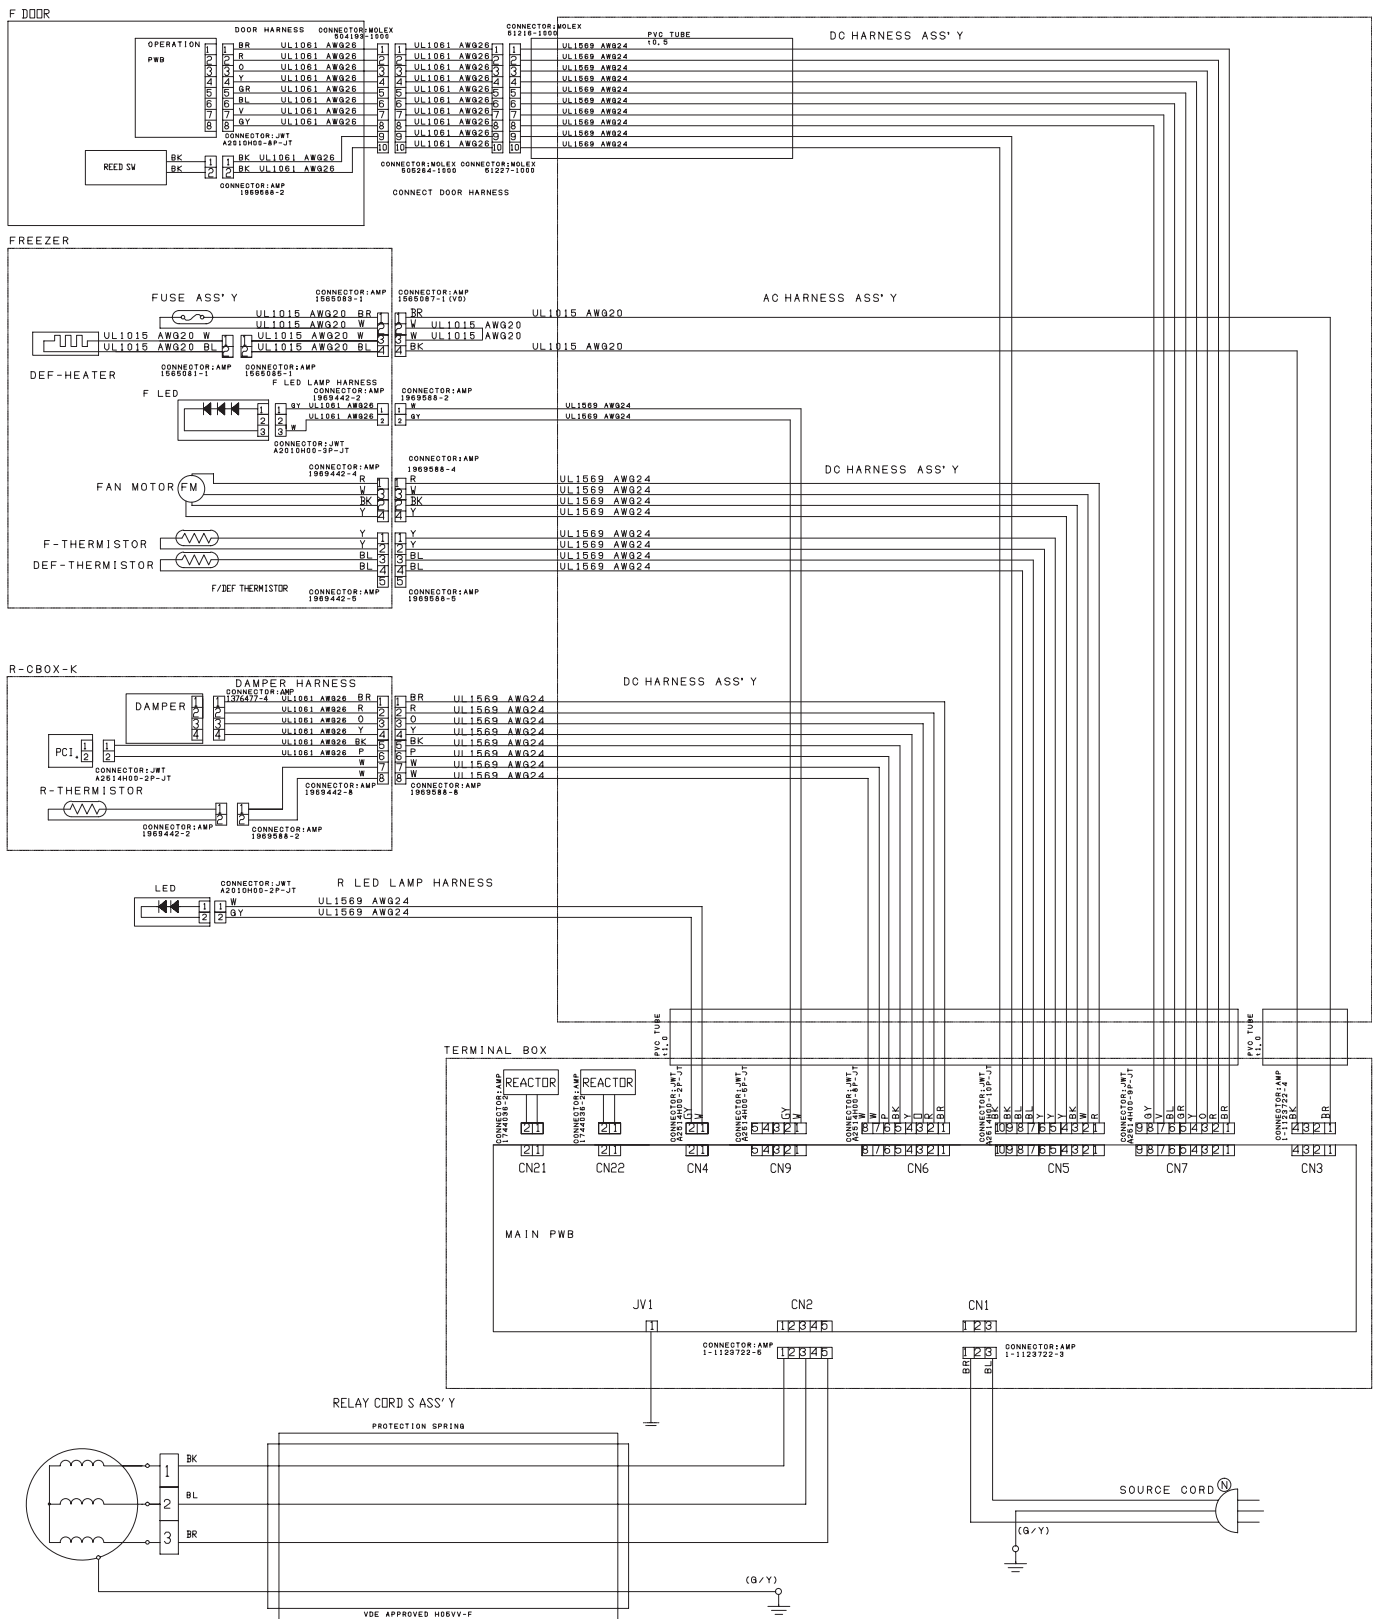


1) Main & PWB (SJ-XG690G)

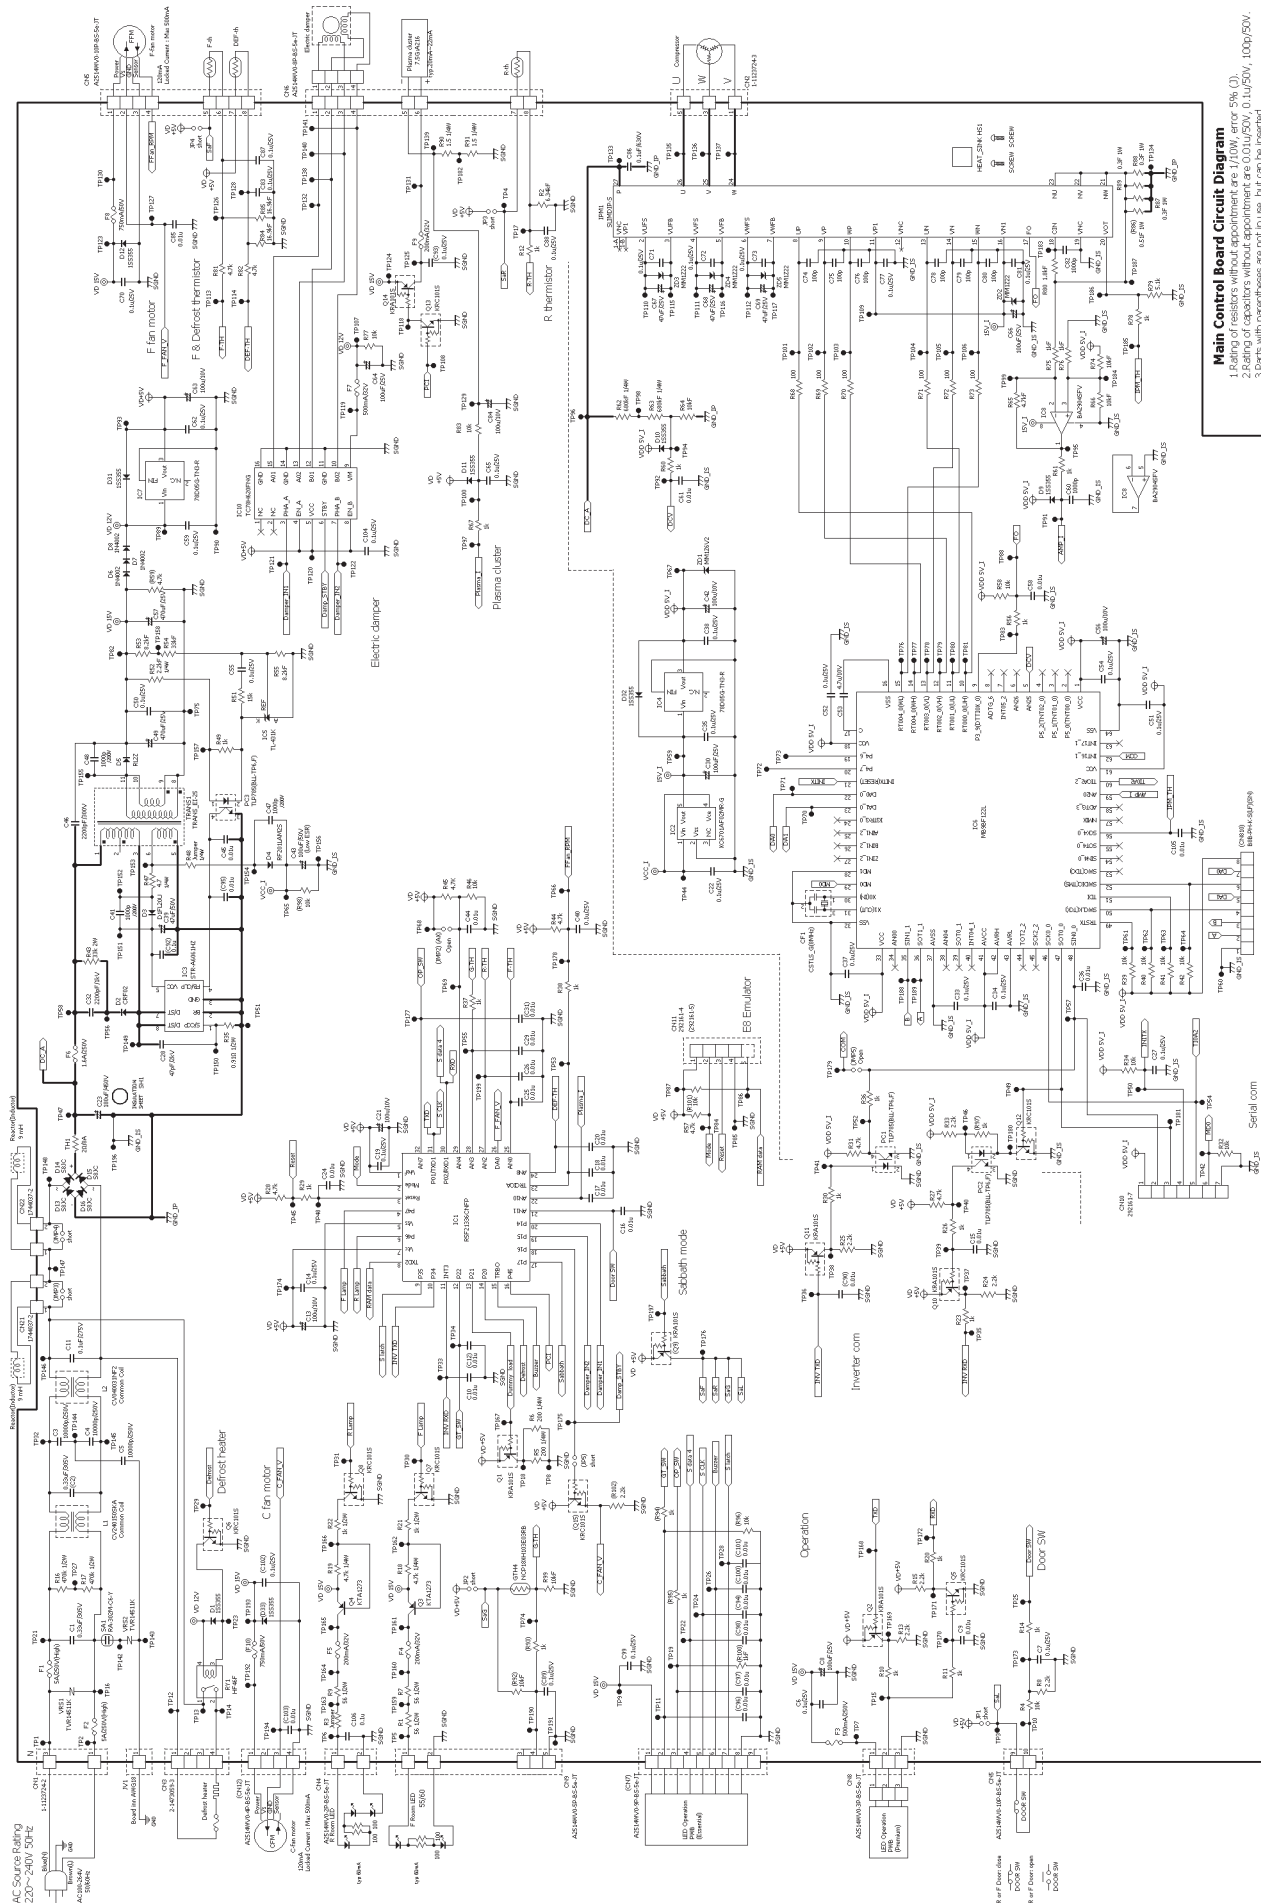


Main Control Board Circuit Diagram

- Main Control Board Circuit Diagram**

2) Main & PWB (SJ-XG640M)

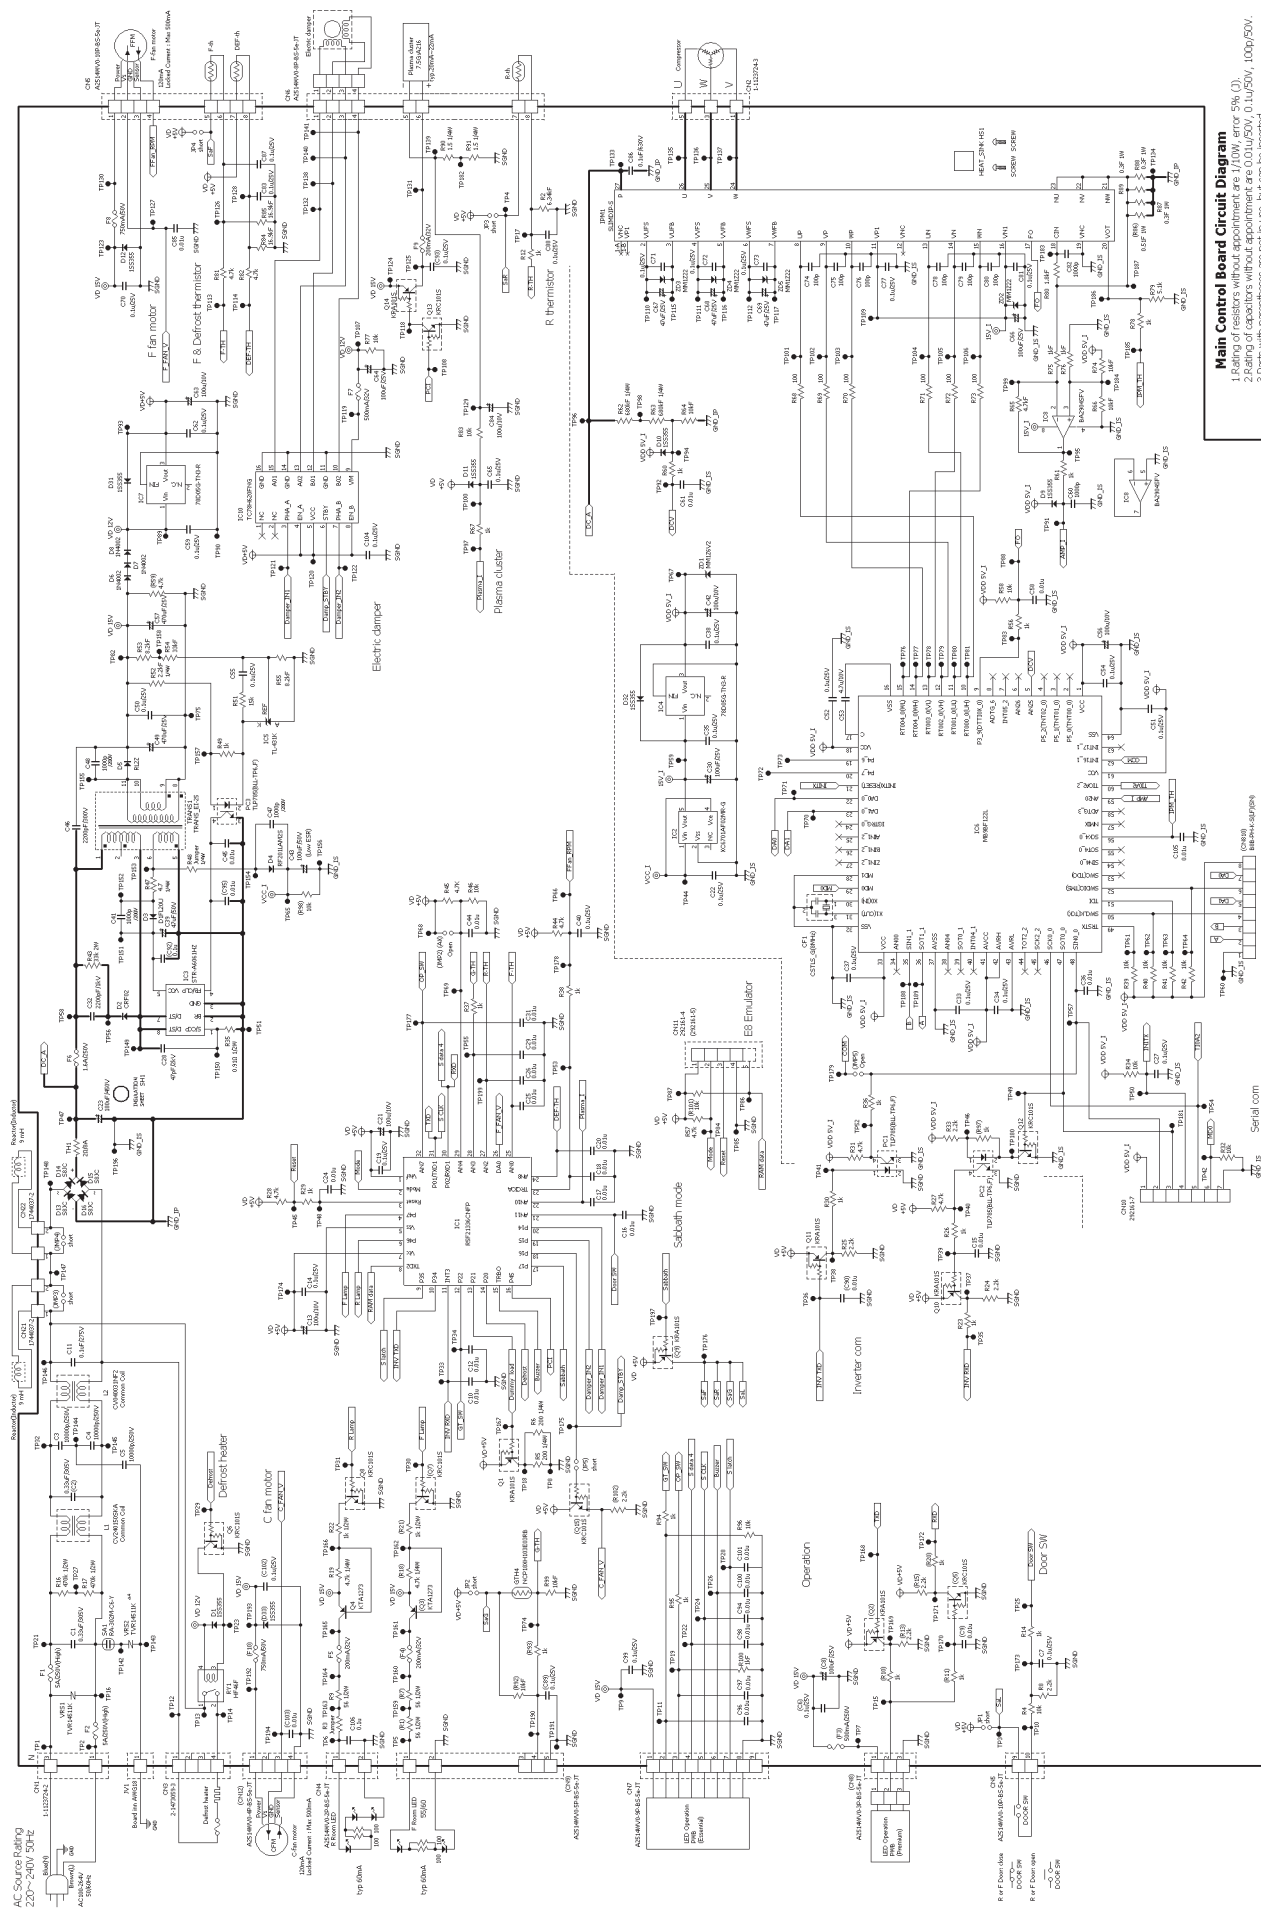

3) Main & PWB (SJ-XG690M)

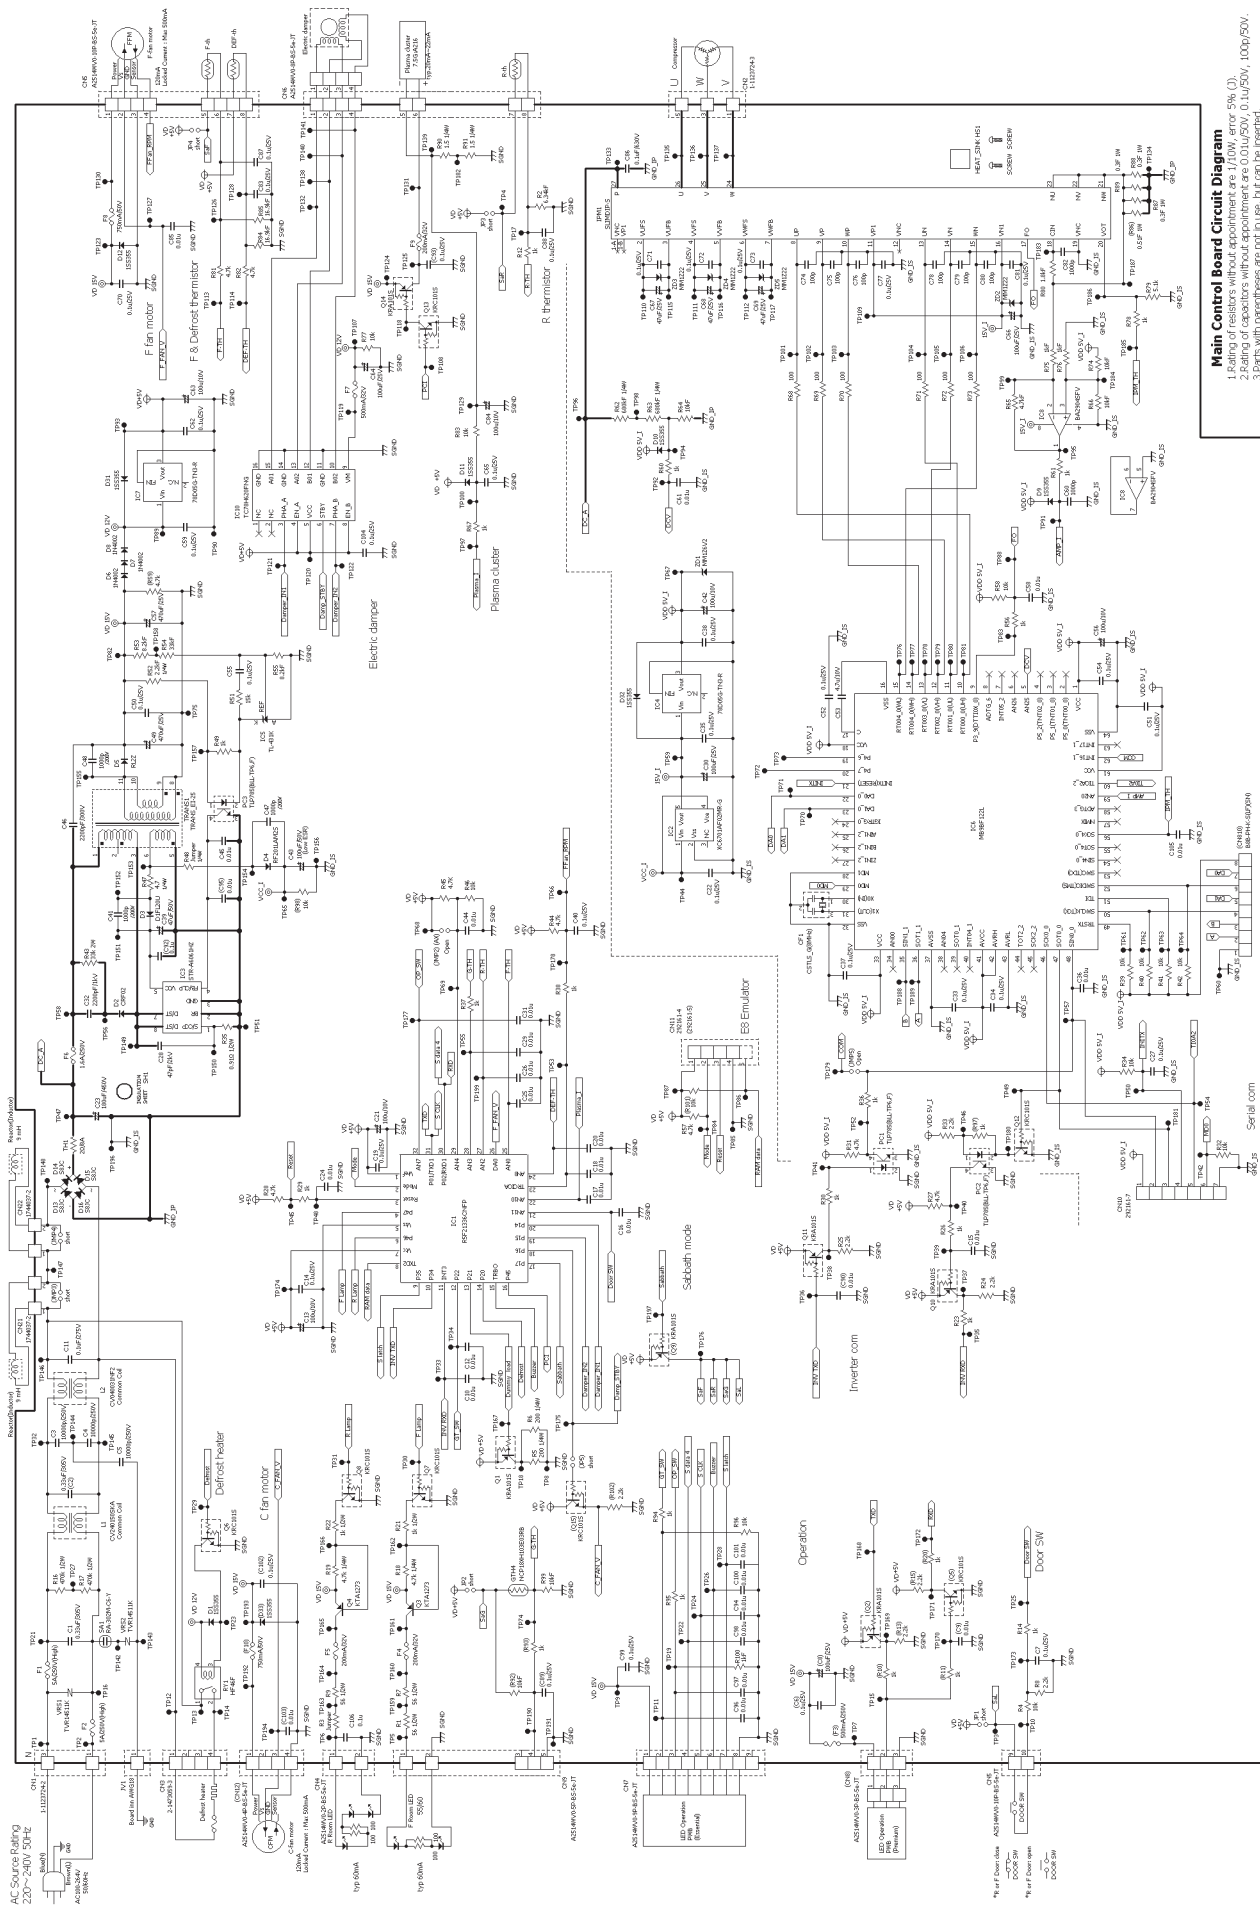

Main Control Board Circuit Diagram

- Rating of resistors without appointment are 1/10W, error 5% (J).
Rating of capacitors without appointment are 0.01u/50V, 0.1u/50V, 100p/50V.
Parts with parentheses are not in use, but can be inserted.