

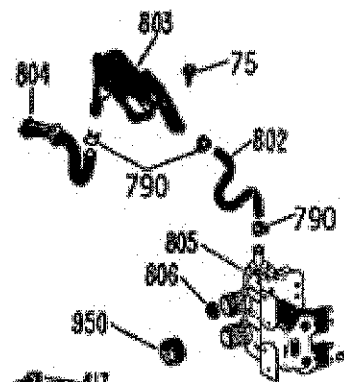
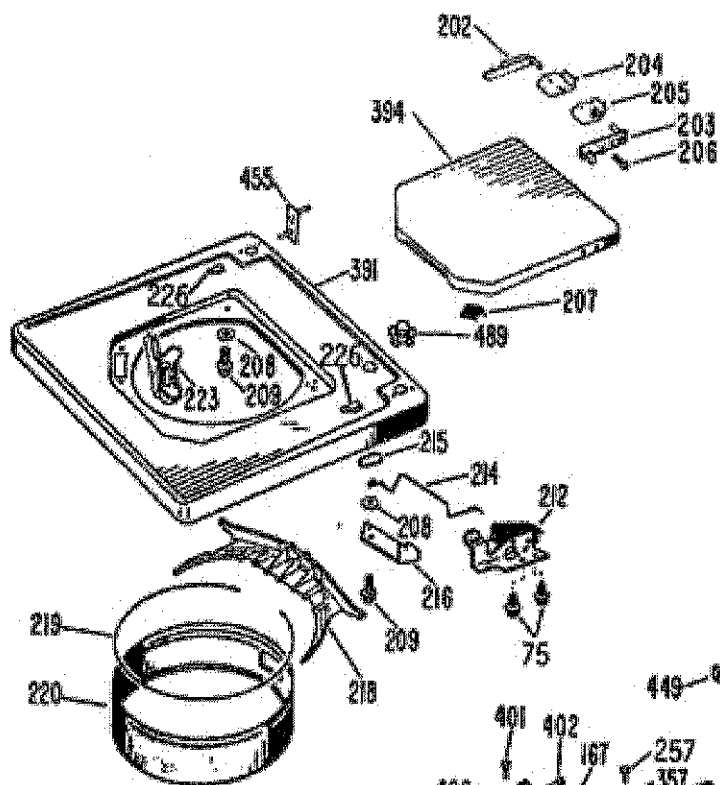
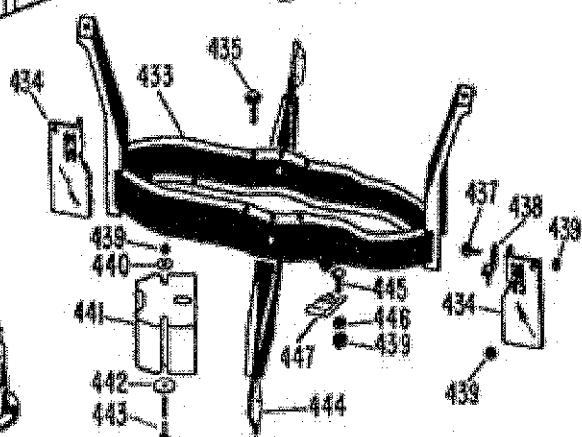
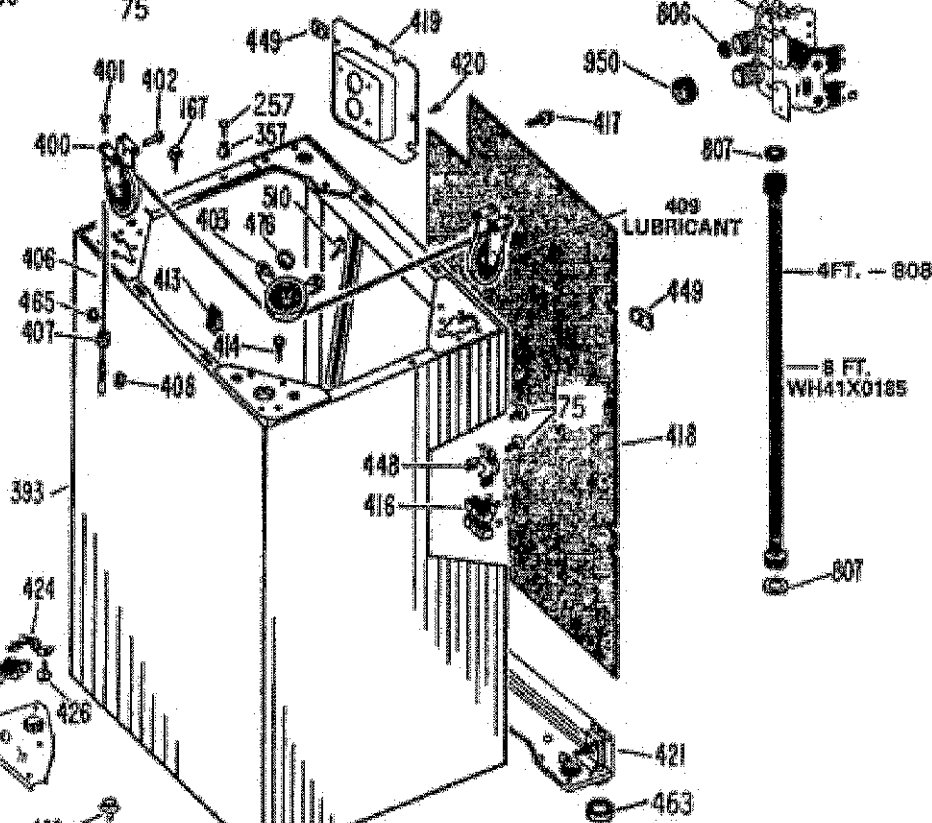



TERM. 935
TERM. HSNG. 546




WIRE CONNECTORS

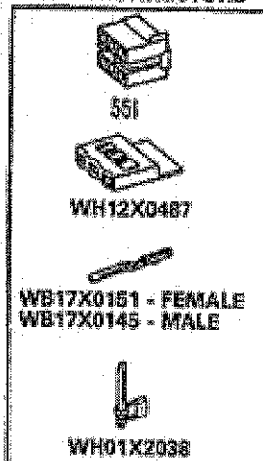


SEE NEXT PAGE
FOR COMPONENT
PARTS

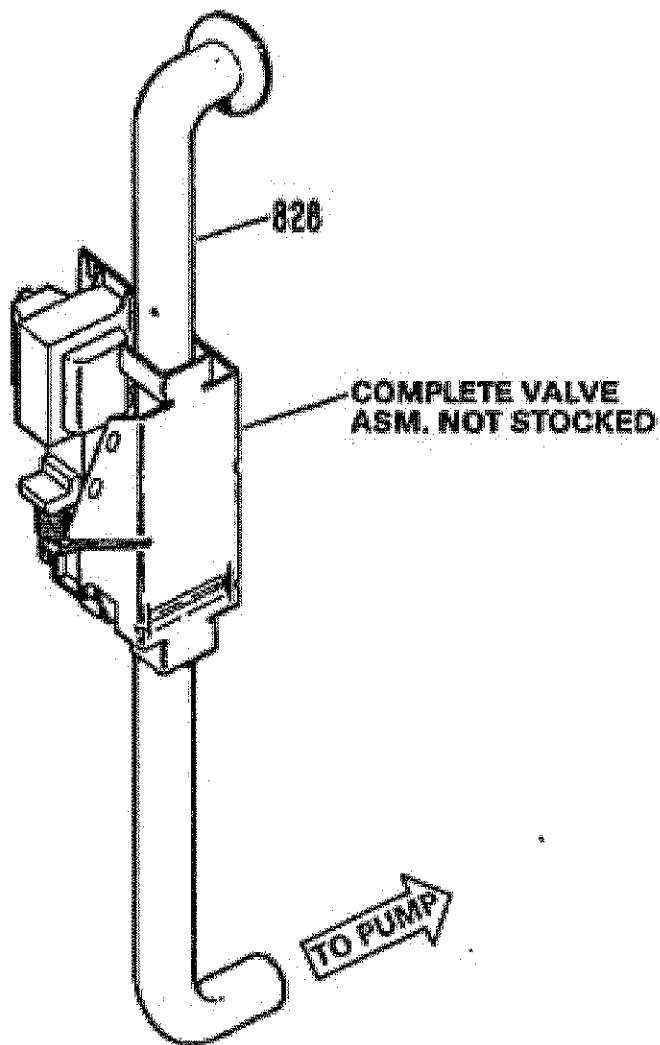


PINCH VALVE COMPONENTS

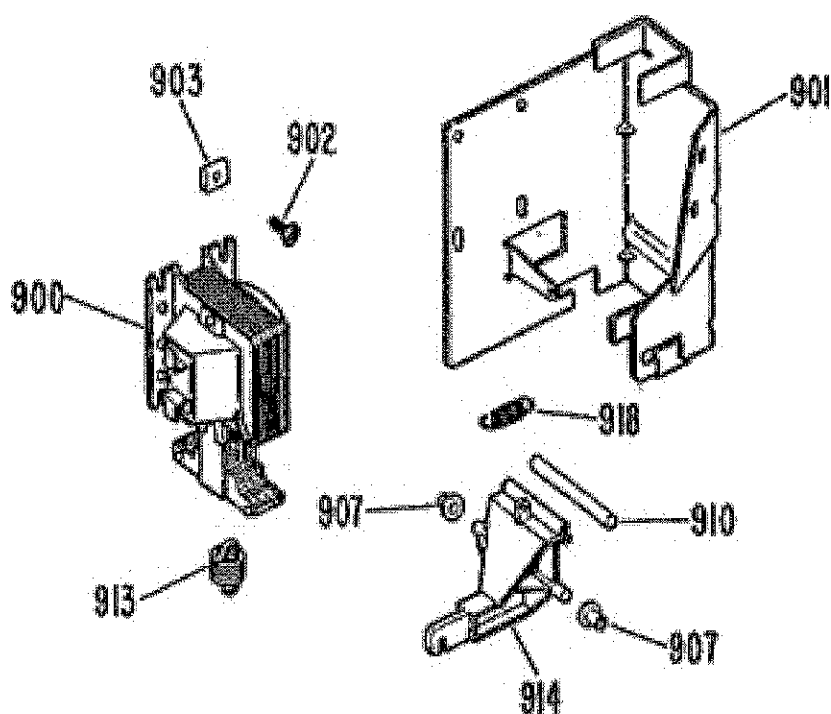


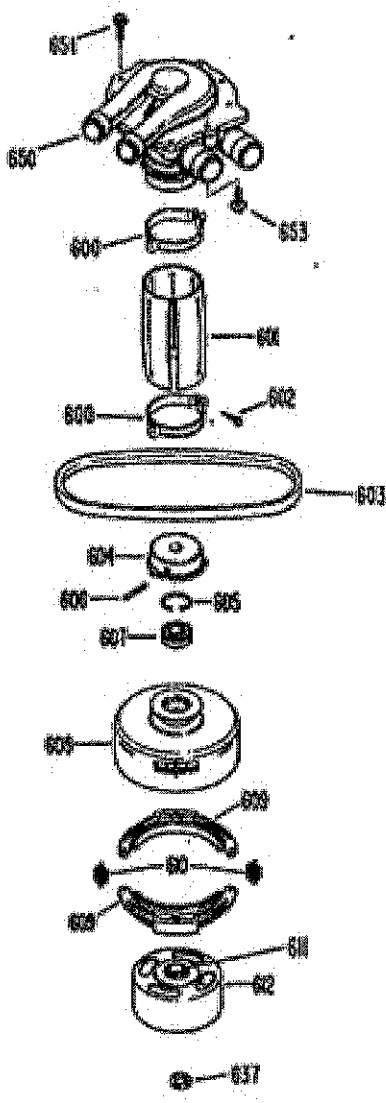


645
SHIFTER ASM. COMPLETE

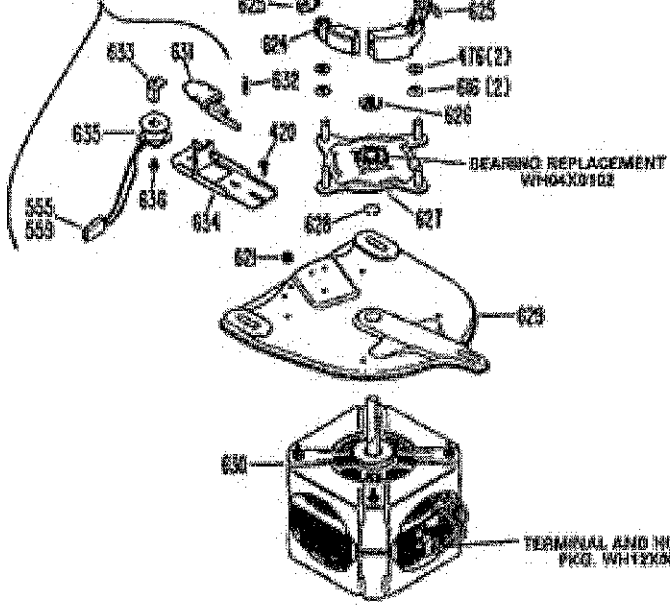


BEARING REPLACEMENT
W/04X0102




TERMINAL AND HOUSING
PKG. WH12K0556

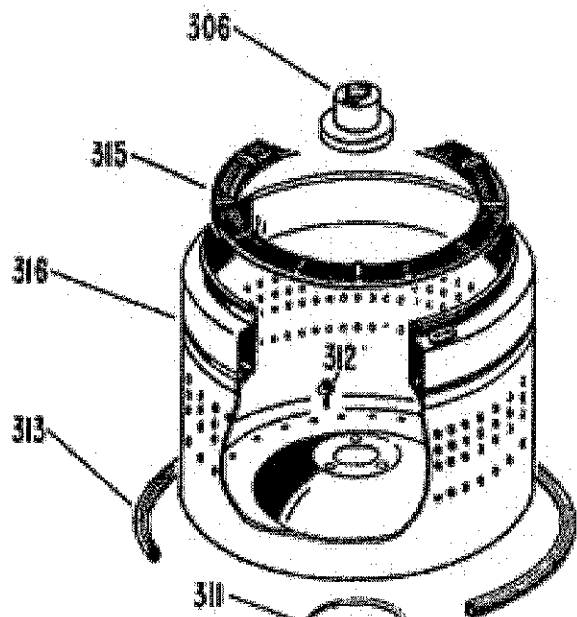

USE WH60X0015 ADHESIVE
AT HOSE TO TUB
CONNECTIONS

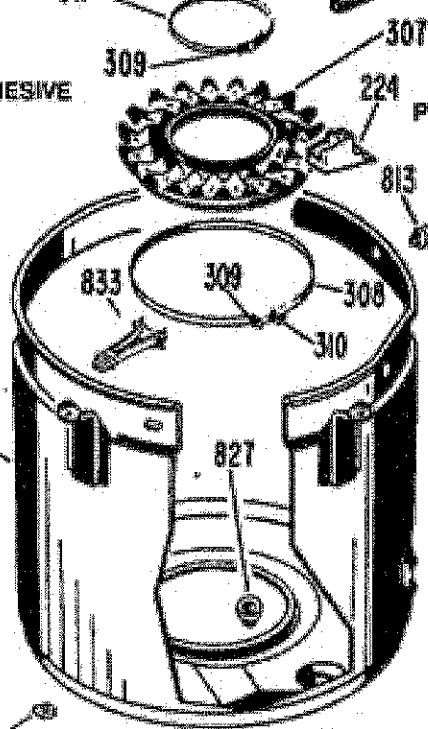

TO
PRESSURE
SWITCH

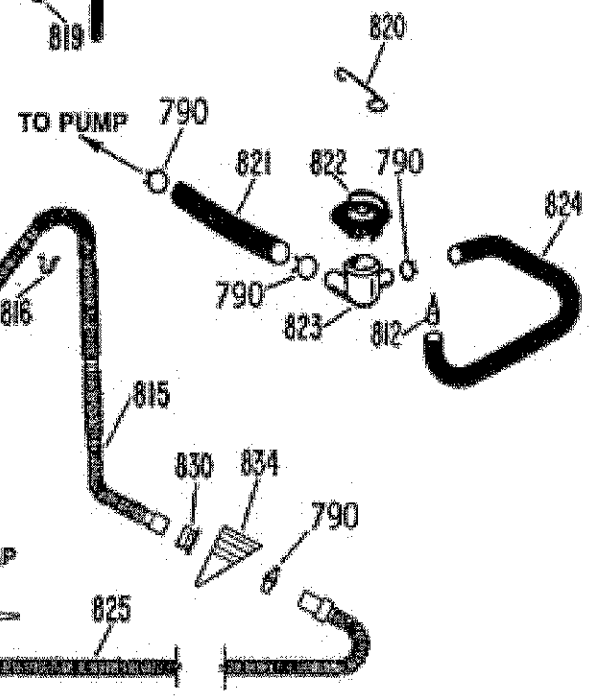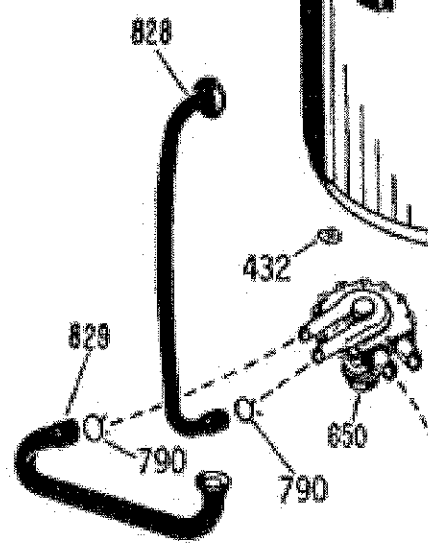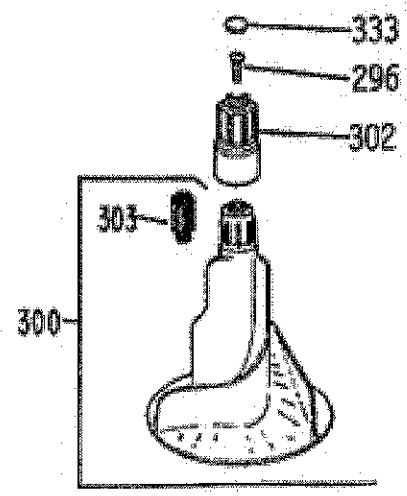

835-TIE STRAP

NOTE: FOR LUBRICATION USE 86 OZ. OF WH60X0011 OIL. # USE WL39X0001 AS A SEALANT. REFER TO SERVICE MANUAL FOR APPLICATION.

